



---

## **Star-Sep™ Ceramic Crossflow Microfiltration Applications**

---

***The recycling of process water containing radioactive contamination within a Refurbishment Facility using Ceramic Star Channel Crossflow Microfiltration.***



Mantec Technical Ceramics Limited has enjoyed success in a number of very different applications with its Ceramic Star Channel Crossflow Microfiltration elements and modules. One such application is the recycling of process water containing radioactive contamination (NORMs) within a Refurbishment Facility at **Imerys Minerals Ltd**, now **Reclaym Ltd**, St. Austell in Cornwall.



Radioactive contamination can result from industrial processing of china clay; the problems posed by this Naturally Occurring Radioactive Materials (NORMs) create problems in the refining processes of China Clay. The resulting contamination can occur in process pipework, centrifuges and other process equipment within the clay refining industry. Following research and extensive radiochemical analysis, Imerys constructed a state of the art refurbishment facility in Cornwall.

During the research phase, it was concluded that the optimum cleaning method was to use ultra high pressure (UHP) water jetting. UHP jetting is the usual method utilised for scale removal in offshore environments, however, there are few facilities onshore. The process is described on the next pages.




## **Star-Sep™ Ceramic Crossflow Microfiltration Applications**

### ***The recycling of process water containing radioactive contamination within a Refurbishment Facility using Ceramic Star Channel Crossflow Microfiltration.***

The process description is broadly outlined as follows: the contaminated items of equipment are decommissioned and placed into licensed storage pending cleaning and decontamination. Where possible items will be cleaned and recycled but in other circumstances they may have to be scrapped.

On removal from storage the contaminated items arrive at the facility where they are received into a designated unloading bay. Next, they are prepared for treatment by either mechanical disassembly or cut using a bandsaw. Following this, the items are subject to a UHP water jet cleaning regime at pressures up to 40,000 psi. This is carried out in a sealed area.

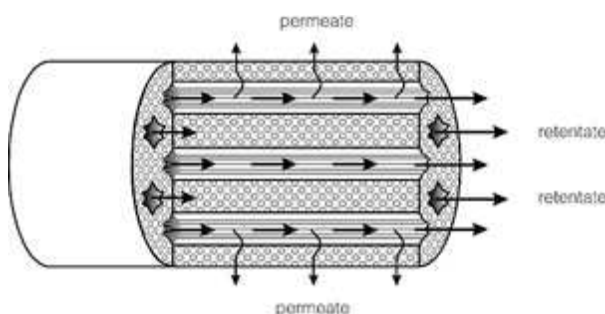

Following decontamination, the water / scale mix is collected in a settling tank where, after settlement, the water is pumped through a prefilter and then through Mantec Crossflow Microfiltration Membranes (0.2 microns) for re-use. The crossflow microfiltration process, using Mantec's patented star channel membranes, renders the filtered water bacterially inactive and free of NORMs.


The waste material from the settlement tank is processed and encapsulated in cement to contain and stabilise the waste prior to disposal via an approved route.

The Mantec Crossflow Microfiltration equipment was installed into the facility in 2003 and has since been enhanced by the fitting of an automated backpulsing system.



## Star-Sep™ Ceramic Crossflow Microfiltration Applications

***The recycling of process water containing radioactive contamination within a Refurbishment Facility using Ceramic Star Channel Crossflow Microfiltration.***

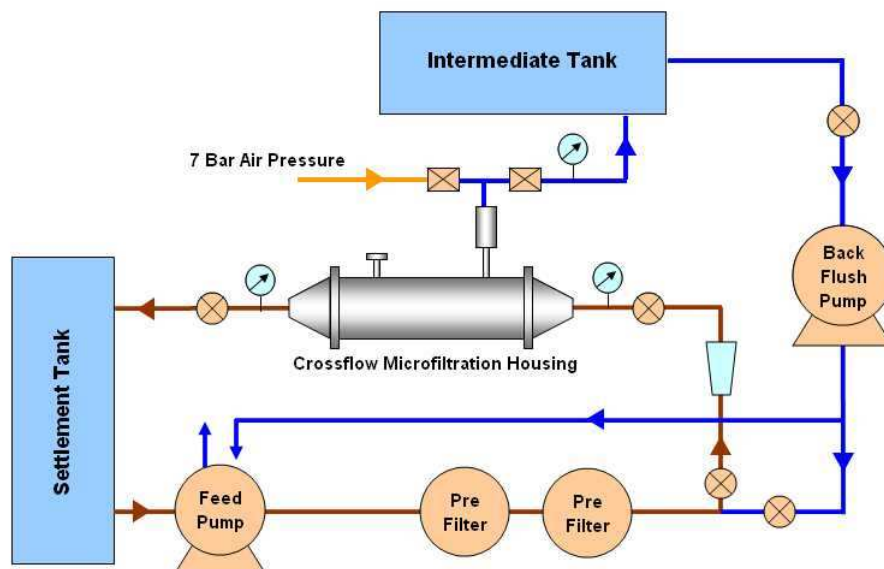

The diagram above illustrates how the feedstock, contaminated with NORMS and bacteria, is pumped around in a loop through the pre-filter and through the channels of the crossflow membranes. The permeate is shown held in an intermediate tank.

Mantec's Star-Sep™ Ceramic Crossflow Microfiltration Elements are available in various sizes and pore diameters. A full range of housings tailored specifically for each application are also available. Our sister company Xtract Filtration Systems Ltd can engineer, design and supply fully integrated systems for this, and other applications. For more information, please visit our website or contact our sales department.